


Click here to create a send (bus). This will also create an Aux return channel

(1) Select Bus 1  
This will create  
an Aux 1  
return Bus

Aux 1  
return Bus

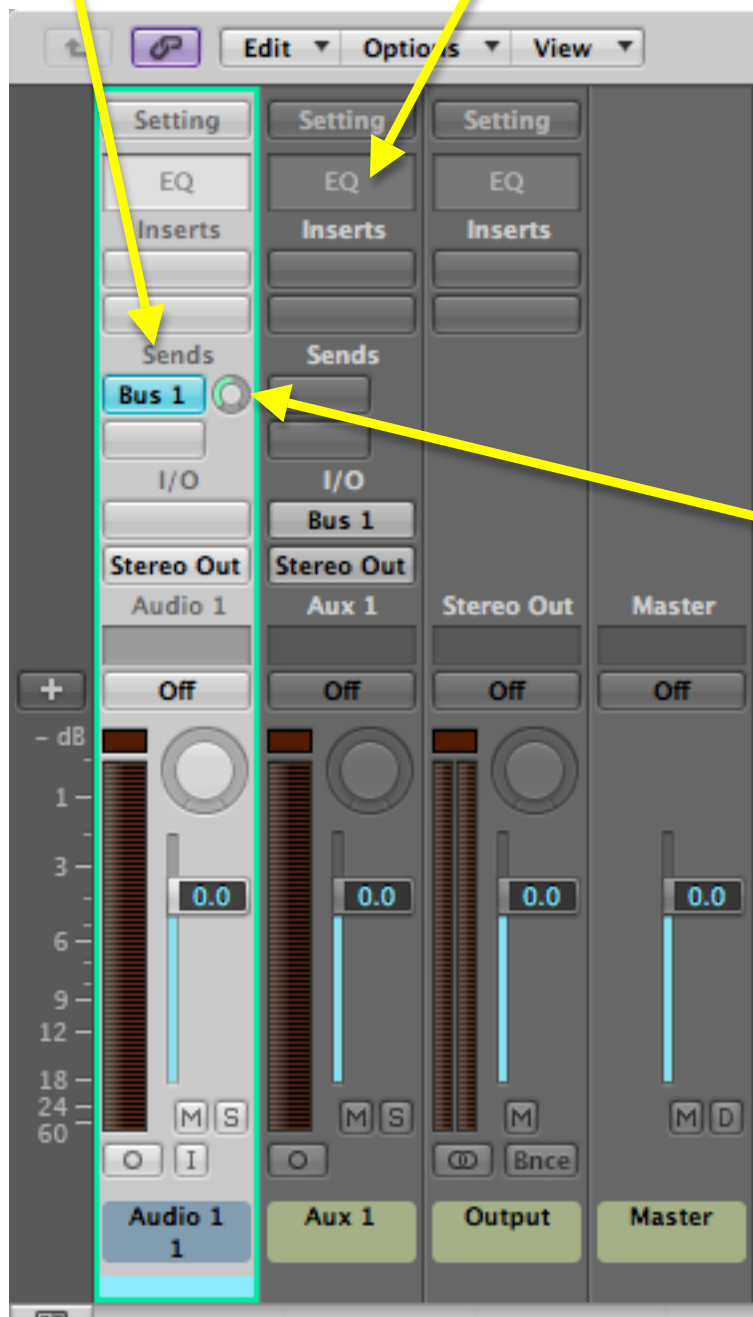

(2) Adjust send level to -6db (a good place to start) Note the turquoise circumference that indicates level.



You can select to send the signal to Bus 1/Aux 1 pre fader. This means that the signal is independent of the fader level. In this mode Bus 1 has a green background.

This small control (now green) controls the level to the Aux 1 strip independent of the fader level.

Send level is now independent of this fader. In post fader mode the send comes after this fader so this level controls both the original signal and the send.

