

OPNET Technologies, Inc.

OPNETWORK2011

Simulation and Performance Evaluation of WiFi and WiMAX using OPNET

Ravinder Paul
Sukhchandan Lally
Ljiljana Trajković

Communication Networks Laboratory
<http://www.ensc.sfu.ca/~ljilja/cnl>
School of Engineering Science
Simon Fraser University, Vancouver, British Columbia
Canada

Copyright © 2011 OPNET Technologies, Inc.

CONFIDENTIAL - RESTRICTED ACCESS: This information may not be disclosed, copied, or transmitted in any format without the prior written consent of OPNET Technologies, Inc.
Used with permission of the Author.

Roadmap

- Introduction to WiMAX and WiFi
- OPNET simulation setup
- Simulation results
- Conclusions and future work
- References


What is WiFi?

- Wireless Fidelity
- Based on the IEEE 802.11 standard
- It operates in 2.4 GHz frequency band and provides data transfer at maximum rate of 54 Mbps
- WiFi has two types of components: a wireless client station and an access point (AP)



What is WiMAX?

- Worldwide Interoperability for Microwave Access
- Based on IEEE 802.16e standard
- Uses Scalable Orthogonal Frequency-Division Multiple Access (SOFDMA) rather than Orthogonal Frequency-Division Multiplexing (OFDM)
- It employs two multiple duplexing schemes: Time Division Duplexing (TDD) and Frequency Division Duplexing (FDD)
- Provides bandwidth to hundreds of Internet subscribers with frequency band frame 10 GHz to 66 GHz

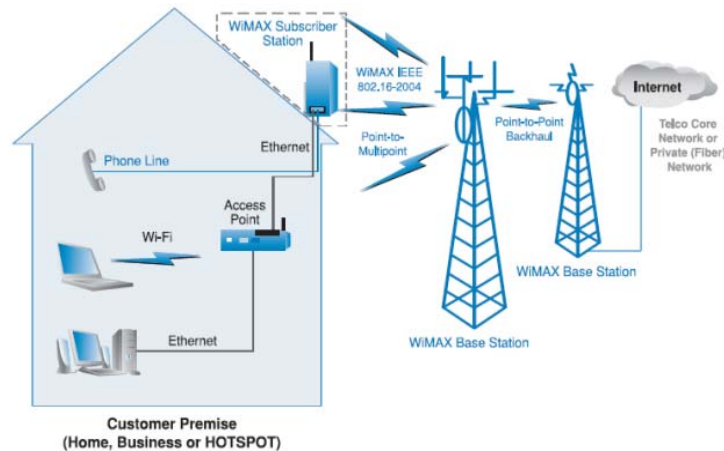

Comparison between WiMAX and WiFi

WiFi

- Half duplex
- Used for wireless LAN applications
- Channel bandwidth of 20 MHz
- Employs modulation techniques: QPSK, BPSK, 16-QAM, 64-QAM
- Convolution code used for forward error correction
- OFDM (64-channels) radio technology
- Frequency spectrum of 2.4 GHz and 5 GHz bands

WiMAX

- Full duplex
- Used for broadband wireless access application
- Channel bandwidth between 1.25 MHz to 20 MHz
- Employs modulation techniques: QPSK, BPSK, 16-QAM, 64-QAM, 256-QAM
- Convolution code Reed-Solomon used for forward error correction
- OFDM (256-channels) radio technology
- Frequency spectrum of 2.3, 2.5, and 3.5 GHz bands

Motivation


- WiMAX is readily available
- As of April 2011, WiMAX Forum claims there are over 582 WiMAX networks deployed in over 147 countries
- Today, one in ten people around the world use Wi-Fi at home and at work in countless ways
- Video conferencing is becoming very popular, which enables face-to-face and real-time communications

Roadmap


- Introduction to WiMAX and WiFi
- OPNET simulation setup
- Simulation results
- Conclusions and future work
- References

OPNET simulation setup

- OPNET models are developed for WiFi fixed and mobile stations in a small-scale network of 5 km × 5 km
- The first WiFi scenario consists of eight stationary workstations: node_0 to node_7
- In the second scenario, eight WiFi mobile stations are randomly located: mobile_node_0 to mobile_node_7
- AP is connected to the switch and to server by a link

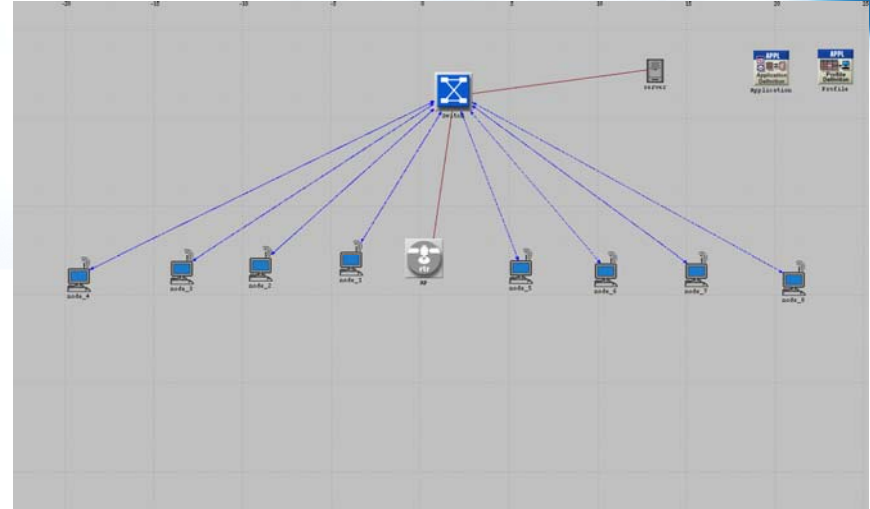


Scenario one

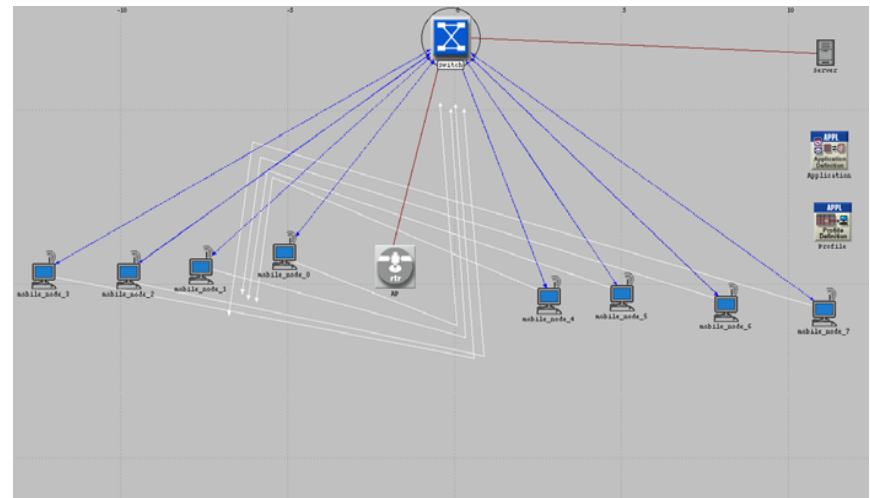

Scenario two

OPNET simulation setup

- WiMAX scenario with randomly located mobile stations
- WiMAX scenario has one BS and eight MS's that randomly move over defined trajectories that are identical to trajectories in WiFi scenarios

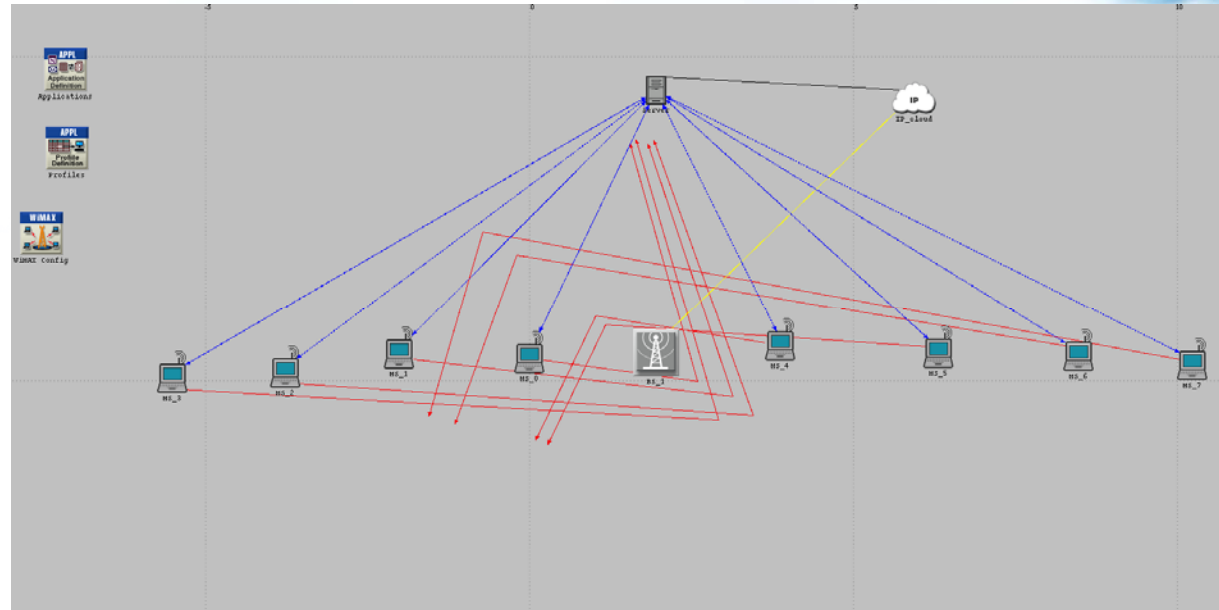

MS: mobile station
WS: work station
BS: base station

Simulation parameters


- We applied the extended rate physical (PHY) layer (802.11g) standard for WiFi scenario with 24 Mbps data rate for both WiFi workstations and the AP
- The WiMAX parameters are:
 - antenna gain of 1 dBi
 - maximum transmission power of 2W
 - PHY profile wireless OFDMA with 5MHz
 - receiver sensitivity of -200 dBm
- The BS parameters for WiMAX scenario:
 - maximum number of SS nodes is 100
- Minimum and maximum power densities:
 - -100 dBm and -60 dBm

AP: access point


Roadmap

- Introduction to WiMAX and WiFi
- OPNET simulation setup
- Simulation results
- Conclusions and future work
- References

Simulation results: HTTP traffic

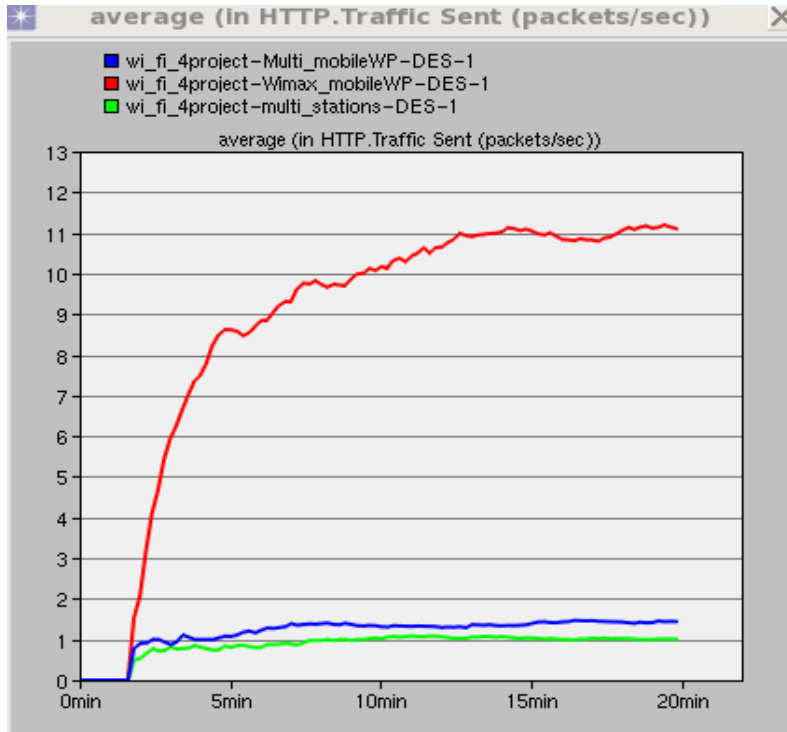


HTTP traffic sent by the server

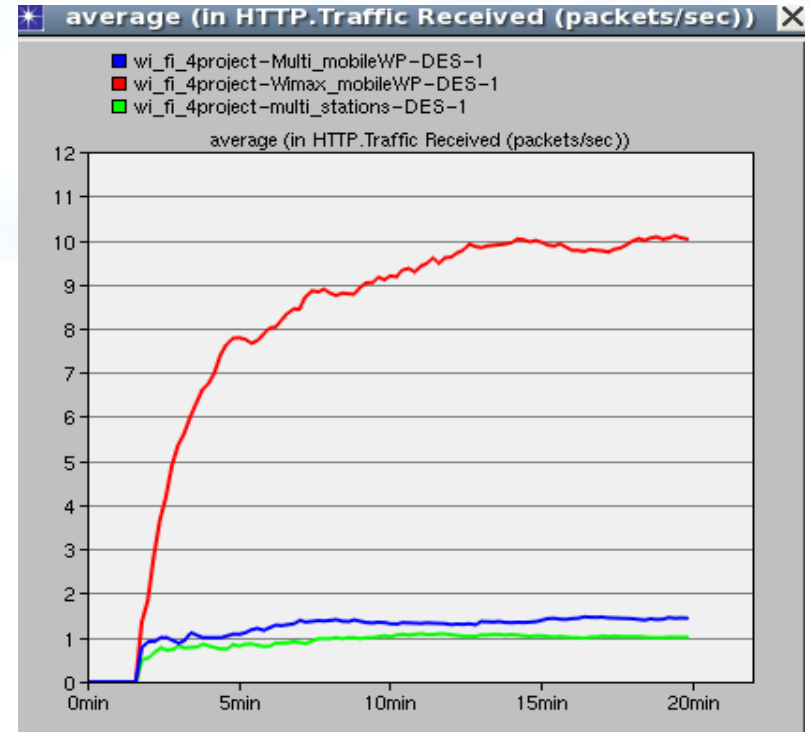


HTTP traffic received by the server

Simulation results: FTP traffic

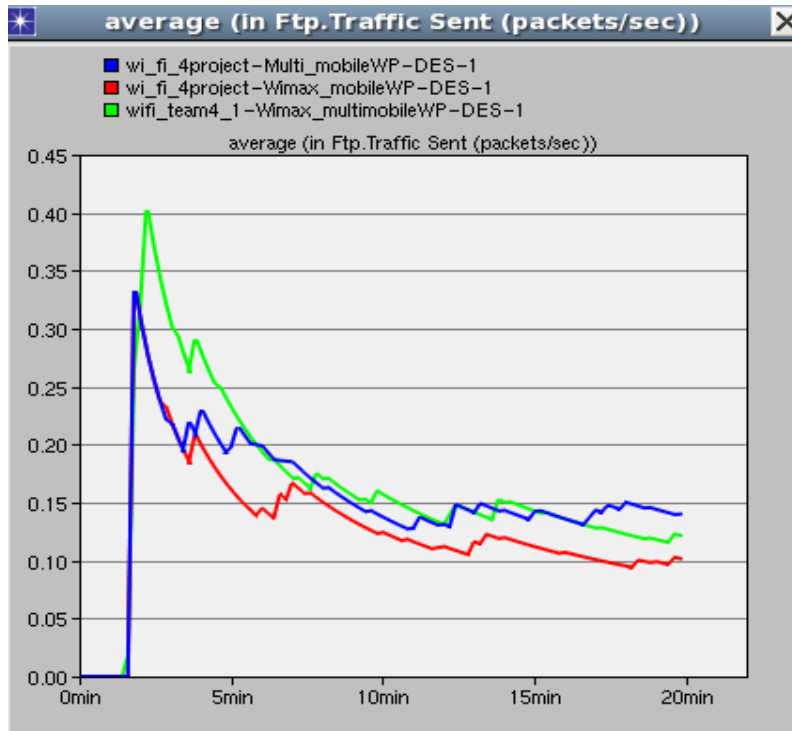


FTP traffic sent by the server

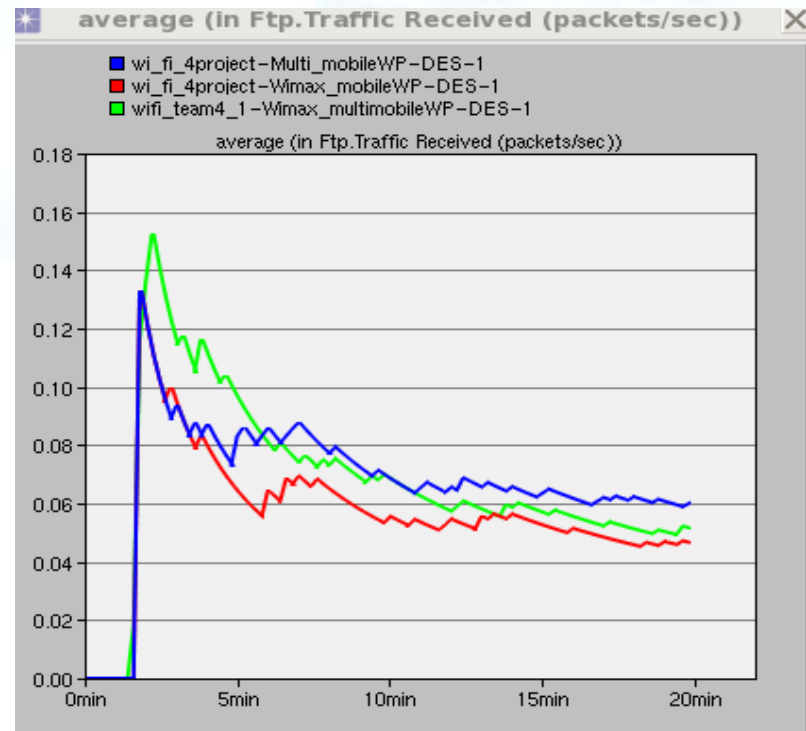

FTP traffic received by the server


Simulation results: MOS

- Voice mean opinion score (MOS)
- MOS provides a numerical measurement of quality of voice signal transmitted
- Mobile WiFi has higher MOS value than mobile WiMAX

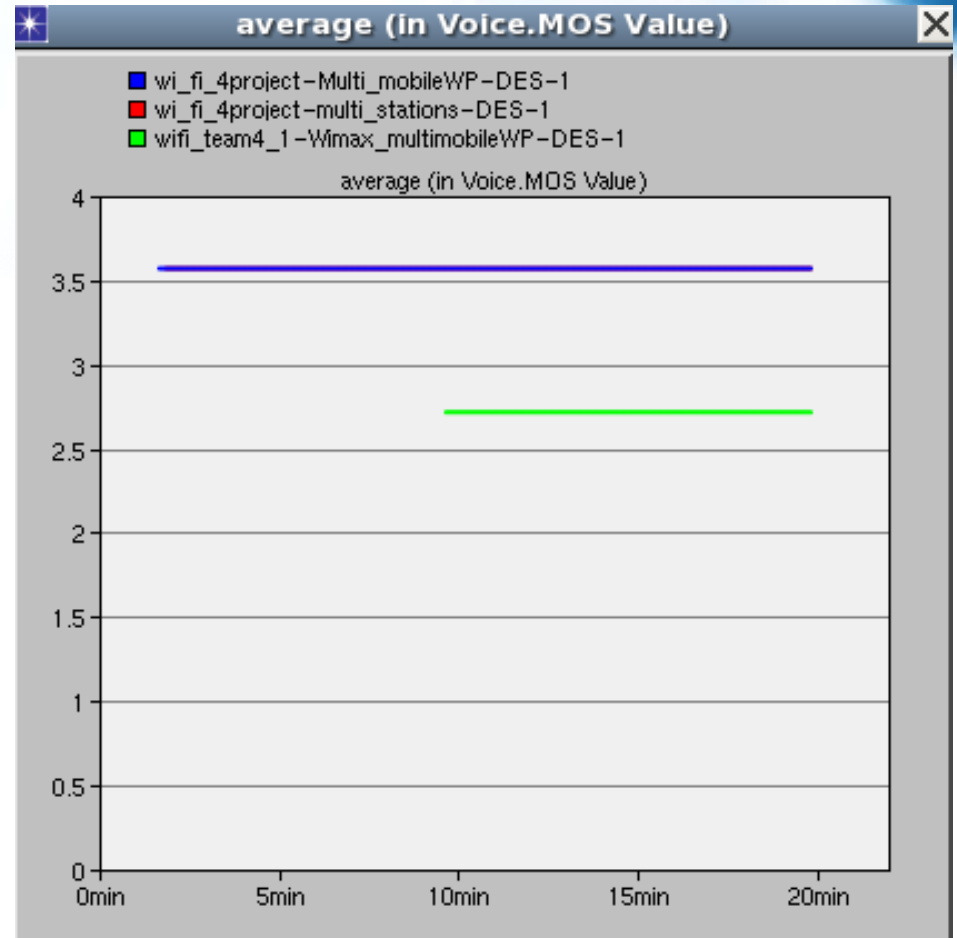


Simulation results: throughput

- Point-to-point throughput of the inward link to the server
- WiFi with moving stations has better throughput than fixed WiFi, which is due to the stations moving closer to the AP
- WiMAX has higher throughput compared to WiFi scenarios

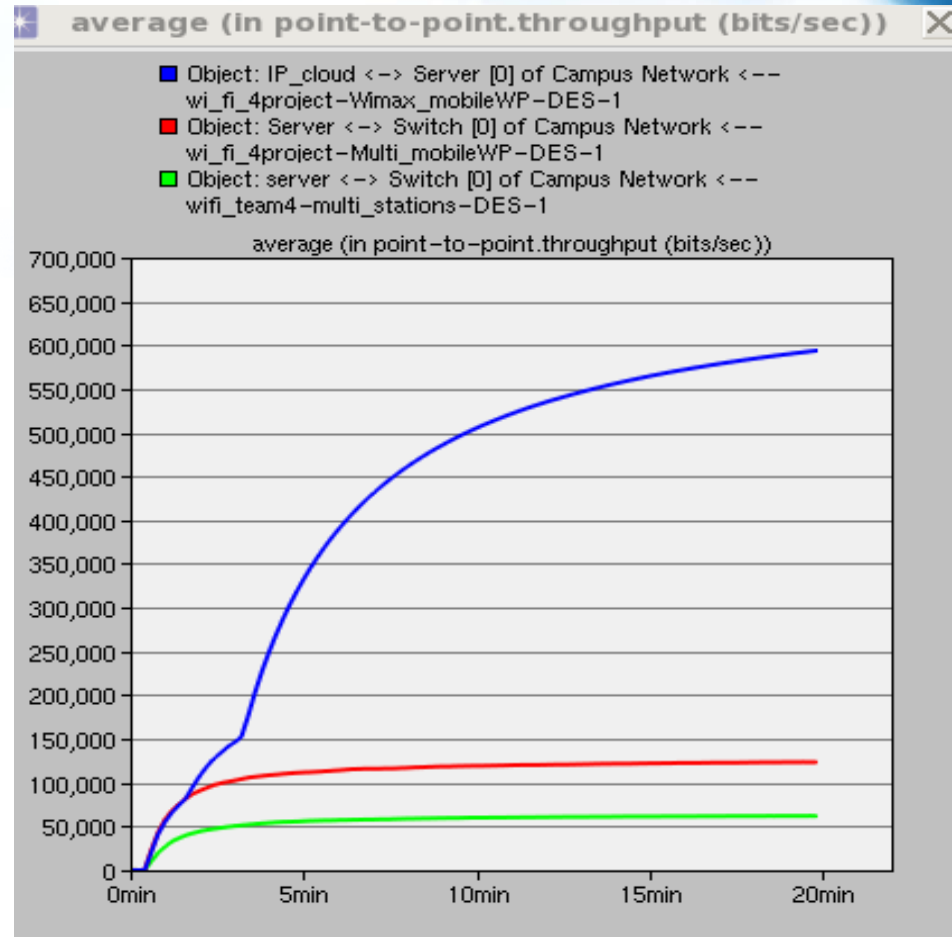


Simulation results: throughput

- Point-to-point throughput of the outward link to the server
- The throughput of the WiMAX network link that carries load from the server has higher point-to-point throughput

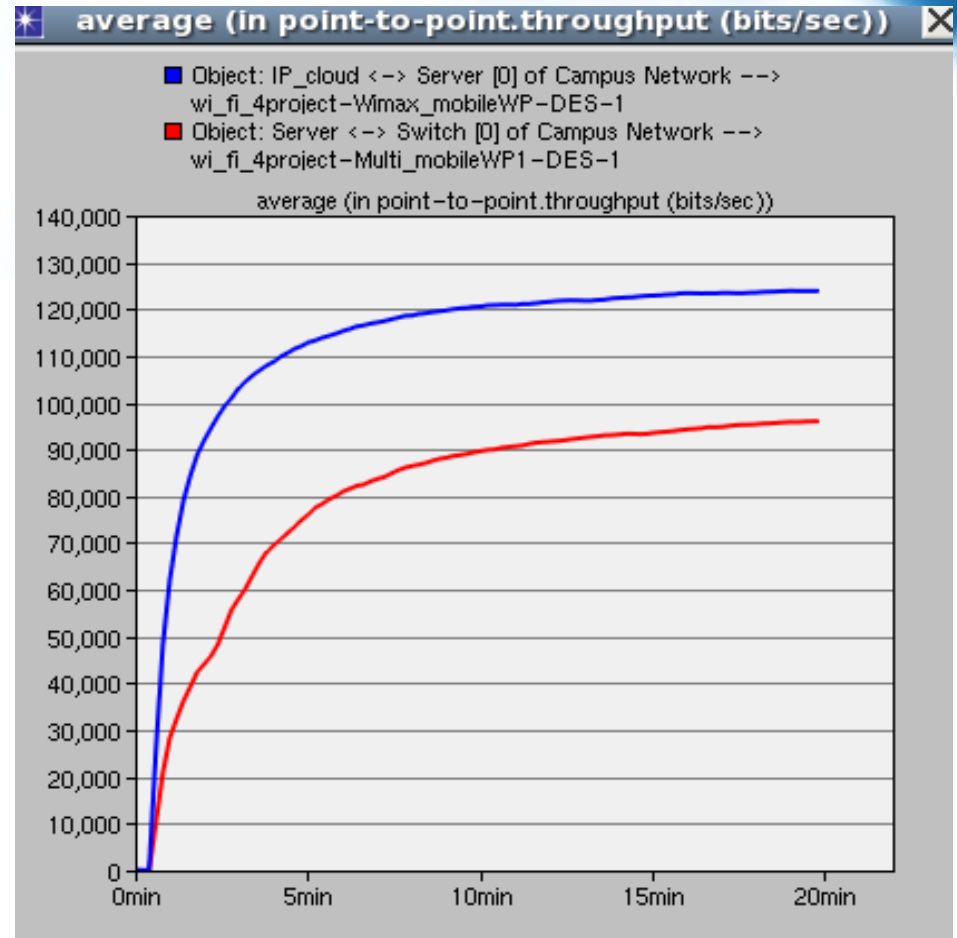


Simulation results: load

- The load carried by AP in WiFi and BS in WiMAX network
- Both WiFi networks carry 25,000 bits over the network while WiMAX carries 45,000 bits

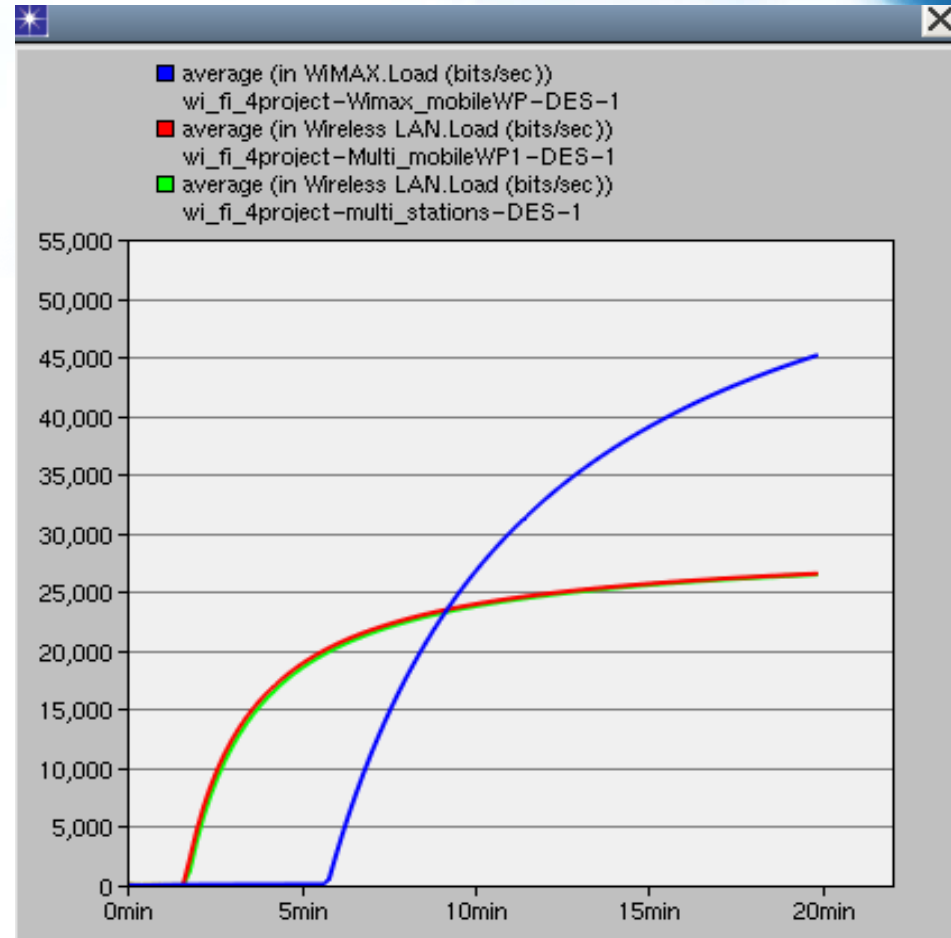


Simulation results: queuing delay

- The average queuing delay of the server to switch link in WiFi and the IP cloud to server link in WiMAX
- It represents the instantaneous measurement of packet waiting times in the queue of the transmitter channel
- Queuing delay for mobile WiMAX in a small area network is smaller compared to fixed and mobile WiFi

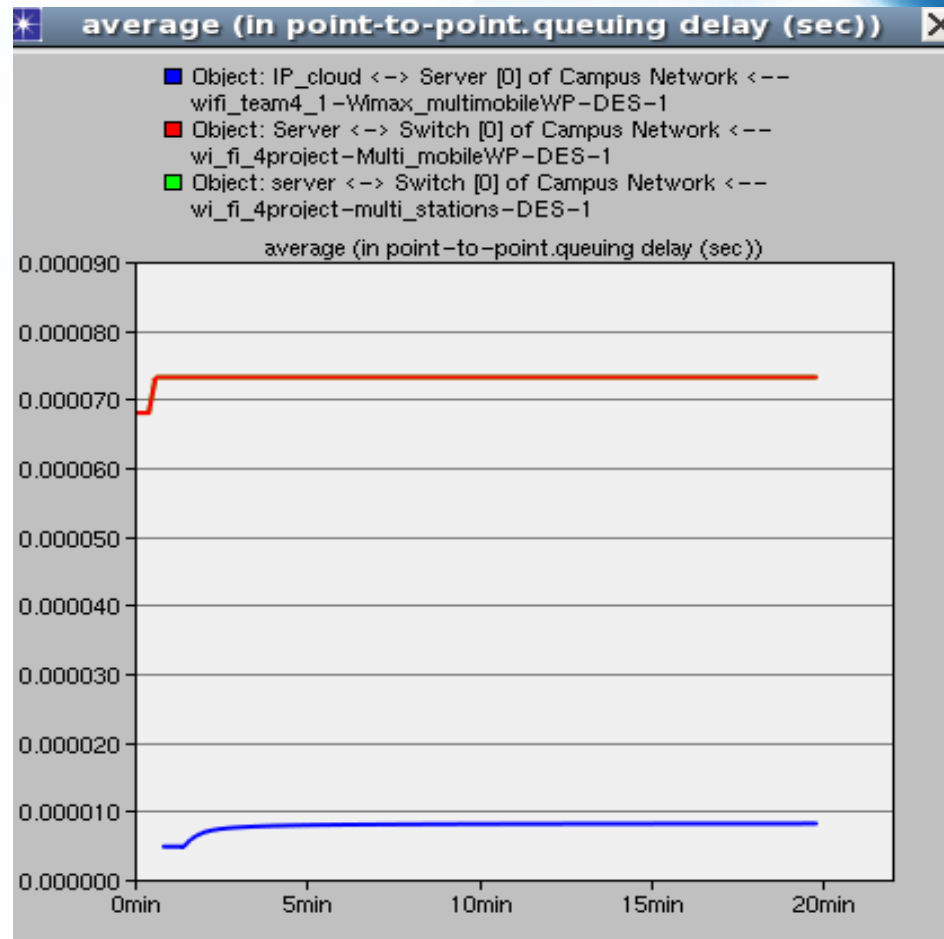

Simulation results: queuing delay

- The average queuing delay of switch to server link in WiFi and IP cloud to server link in WiMAX
- The measurements of the average queuing delay are taken from the moment when a packet arrives into the queue until the time when the last bit of the packet is transmitted
- In WiMAX scenario, the queuing delay of this link starts to decrease as the load starts to increase

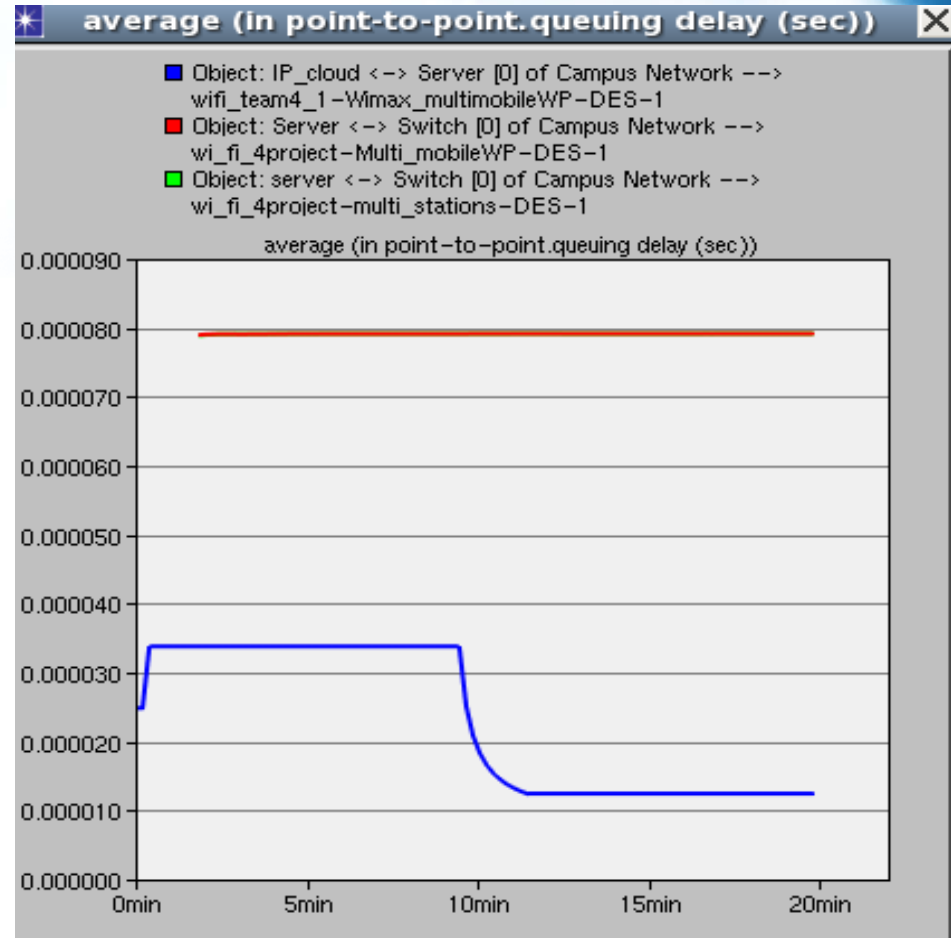

Roadmap

- Introduction to WiMAX and WiFi
- OPNET simulation setup
- Simulation results
- Conclusions and future work
- References

Conclusions

- Throughput of WiMAX is higher than WiFi
- WiMAX queuing delay is lower because WiMAX provides broadband service to carry heavier traffic load over the network
- WiMAX is more efficient for delivering more data with less queuing delay when compared to WiFi
- WiMAX can handle more load as compared to WiFi
- The base station and router delays in WiFi were compared and, as expected, the delay in WiFi router was higher than the delay in the base station

Future work

- Comparison of WiFi and WiMAX in larger networks
- Handoff comparison in small network vs. large network
- Comparison of WiFi and WiMAX QoS
- Performance optimization with Request-to Send (RTS) and fragmentation

Roadmap

- Introduction to WiMAX and WiFi
- OPNET simulation setup
- Simulation results
- Conclusions and future work
- References

References

- Motorola and Intel, WiMAX and WiFi together deployment models and user scenarios, white paper [Online]. Available: http://www.motorola.com/WiMAX_and_WiFi_Together_Deployment_Models_and_User_Scenarios.
- W. Hruday and Lj. Trajkovic, “Streaming video content over IEEE 802.16/WiMAX broadband access,” *OPNETWORK 2008*, Washington, DC, Aug. 2008.
- Survey: Europe to pass US in WiFi use, [Online]. Available: <http://www.websiteoptimization.com/bw/0803/>.
- C. Heegard, J. Coffey, S. Gummadi, P. A. Murphy, R. Provencio, E. J. Rossin, S. Schrum, and M. B. Shoemake, “High-performance wireless Ethernet”, *IEEE Comm. Magazine*, vol. 39, no. 11, pp. 64-73, Nov. 2001.
- WiFi Network, [Online]. Available: <http://www.networkingaudiovideo.com>.
- B. Lee and S. Choi, *Broadband Wireless Access and Local Networks: Mobile WiMAX and WiFi*. Boston, London: Artech House, 2007.
- W. Hruday and Lj. Trajkovic, “Mobile WiMAX MAC and PHY layer optimization for IPTV,” *Mathematical and Computer Modelling*, Elsevier, vol. 53, pp. 2119–2135, Mar. 2011.

References

- WiMAX (802.16) specialized model, OPNET [Online]. Available: <http://www.opnet.com/WiMAX/index.html>.
- What is WiMAX? [Online]. Available: <http://www.wimax.com/wimax-tutorial/what-is-wimax>.
- WiMAX versus WiFi tutorial [Online]. Available: <http://searchmobilecomputing.techtarget.com/downloads/Finneran.pdf>.
- OPNET Modeler [Online]. Available: <http://www.opnet.com/products/modeler/home.html>.
- WiMAX tutorial [Online]. Available: <http://searchmobilecomputing.techtarget.com/tutorial/WiMAX-tutorial>.
- OPNET product documentation v.11.0.A, OPNET Technologies, Inc., Bethesda, MD, 2004.
- WLAN (802.11), OPNET [Online]. Available: http://www.opnet.com/support/des_model_library/WLAN80211.html.